

# CO<sub>2</sub> Component Description


Flex Hose - 3/4 in.

Effective: November 2016  
K-81-1090 Rev AD

## FEATURES

- For Use With HP CO<sub>2</sub> Only
- RoHS Compliant
- For Approvals, see the latest corresponding Kidde Design, Installation, Operation, and Maintenance (DIOM) Manual

P/N: WK-251821-000

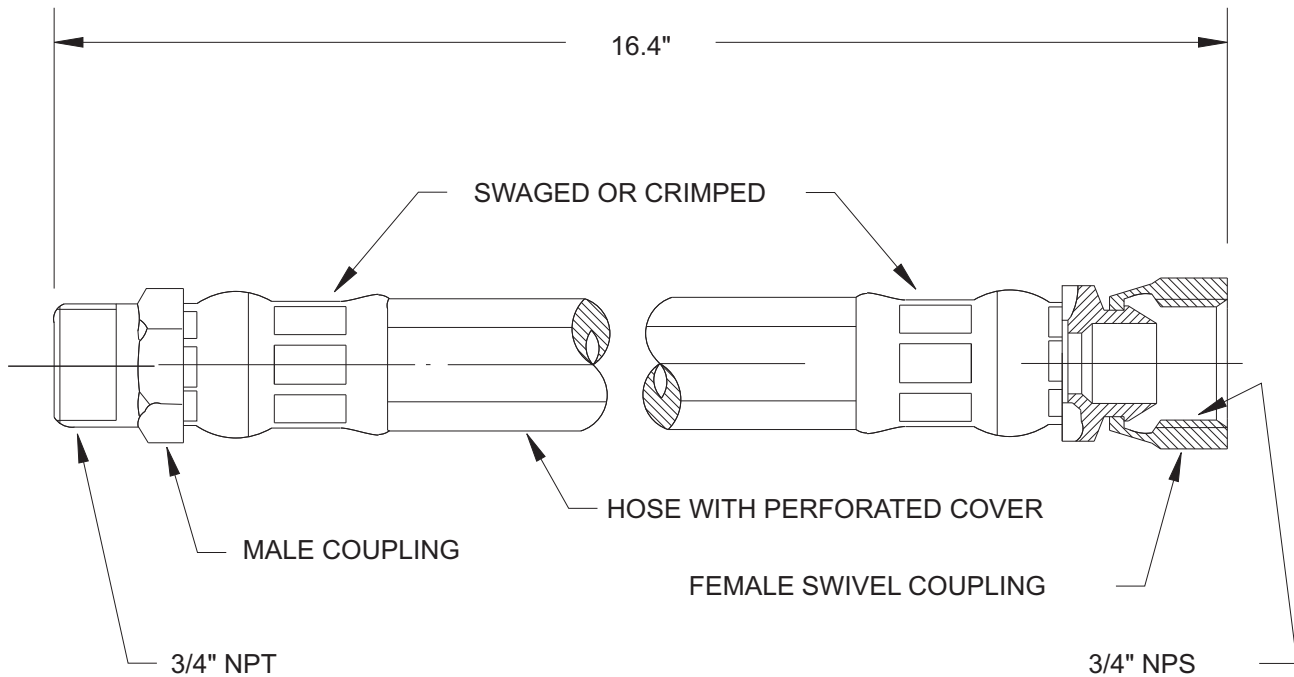

## MATERIALS:

Body: Reinforced rubber with wire braid.  
Fittings: Steel, Trivalent Chromate

## SPECIFICATIONS

Description	Weight	Temperature Rating	Minimum Burst Pressure	Max. Hydro Test Pressure	Industrial DIOM Manual P/N	Marine DIOM Manual P/N
Flexible Hose, 3/4" Outlet	1 lb	-40°F to 250°F (-40°C to 121°C)	6000 PSI (414 bar)	3000 PSI (207 bar)	81-CO2MAN-001	220610

All trademarks are the property of their respective owners.

This literature is provided for informational purposes only. Kidde-Fenwal, Inc. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. The technical data contained herein is limited strictly for informational purposes only. Kidde-Fenwal, Inc. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. If you need more information on this product, or if you have a particular problem or question, contact Kidde-Fenwal, Inc.

©2016 Kidde-Fenwal, Inc.

**EXPORT INFORMATION (USA)**  
Jurisdiction: EAR  
Classification: EAR99  
This document contains technical data subject to the EAR.

Kidde Fire Systems  
400 Main Street  
Ashland, MA 01721 USA  
Ph: 508.881.2000  
Fax: 508.881.8920  
[www.kiddefiresystems.com](http://www.kiddefiresystems.com)